

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number  
WO 03/102353 A1

(51) International Patent Classification<sup>7</sup>: E21B 7/06 (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/GB03/02319

(22) International Filing Date: 28 May 2003 (28.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0212553.2 30 May 2002 (30.05.2002) GB  
0218033.9 2 August 2002 (02.08.2002) GB

(71) Applicant (for all designated States except US): TECHNOLOGY VENTURES INTERNATIONAL LTD [GB/GB]; Suite D 1 St. Swithins Row, Aberdeen, AB10 6DL (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): JAMIESON, Angus [GB/GB]; Crown House, 54 Crown Drive, Inverness IV2 3QG (GB).

(74) Agents: MACDOUGALL, Donald, Carmichael et al.; Cruikshank & Fairweather, 19 Royal Exchange Square, Glasgow G1 3AE (GB).


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DRILLING APPARATUS

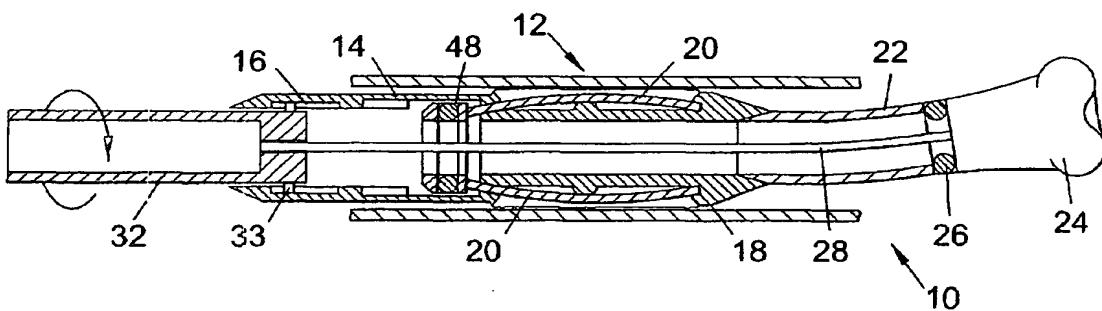

(57) **Abstract:** A drilling apparatus for drilling a deviated bore, comprises a tubular outer member (12) having an offset and adapted for rotatably supporting a drill bit (24). The member has a gripping arrangement (20) for selectively engaging the wall of a bore to restrain the member against rotation. An inner member (32) is provided within the outer member for coupling to the drill bit at one end and to a drill string at another end. The apparatus has a first configuration in which the gripping arrangement is retracted and the inner member is coupled to the outer member such that rotation of the drill string provides for corresponding rotation of the inner and outer members, and a second configuration in which the gripping arrangement is extended and the inner member is rotatable relative to the outer member such that the outer member is restrained from rotation in the bore and rotation of the drill string provides for corresponding rotation of the inner member and the drill bit.